

## DS-D6904UDI Decoder




- Provides HDMI (adaptable to DVI-D) and BNC output interfaces.
- Up to 4K (3840 × 2160@30Hz) via HDMI output interfaces (only for even interface).
- H.265+/H.265, H.264+/H.264, Hik264, MPEG4 and MJPEG video compression.
- PS, RTP, TS, ES, HIK encapsulation formats.
- Three encoding levels: baseline, main, and high-profile.
- G.722, G711A, G726, G711U, MPEG2-L2, and AAC audio compression.
- Two decoding modes: active decoding and passive decoding.
- Remote video files' decoding output.
- Supports two-way audio via client software.
- Supports window opening and window roaming.
- Supports multi-screen control with PC installed with RSC server.
- Gets stream and decodes via URL and RTSP from encoding devices.
- Displays the decoded video stream on the video wall by directly linking cameras or by stream media forwarding.
- You can configure what the video wall shows when decoding ends and streaming fails via the Web browser and client software.
- Configurable LED width and height parameters when the LED is connected.
- Regular and irregular virtual screen configurable to display multiple signal sources and get rid of the restriction of physical screen.
- Accessible by 2.4 MP DeepinView camera.
- Accessible by thermal network camera and you can view the temperature measurement, dynamic fire source detection, ship detection and VCA information in live view and playback.
- You can enable or disable the smart information for the thermal network camera.
- Remote PTZ control via transparent channel.
- Two-way audio.
- Port aggregation technology (Ethernet Channel).



## ▪ Specification

Model		DS-D6904UDI
Input/Output	Input	VGA, DVI-I
	Input Resolution	VGA, DVI-I: WSXGA: 1680×1050/60Hz, WXGA: 1440 × 900/60Hz, WXGA: 1280×800/60Hz, 1366×768/60Hz, 1080p: 1920 × 1080@50/60Hz, UXGA: 1600 × 1200@60Hz, XGA: 1280 × 960@60Hz, 720p: 1280 × 720@50Hz/60Hz, SXGA: 1280 × 1024@60Hz, XGA: 1024 × 768@60Hz
	Output	HDMI : 4-ch, BNC: 2-ch, 1 DB 15
	Output Resolution	HDMI: 4K: 3840 × 2160@30Hz ( for odd interface only ) , 1080p: 1920 × 1080@50/60Hz, WSXGA: 1680×1050/60Hz, UXGA: 1600 × 1200@60Hz (for odd interface only), 720p: 1280 × 720@50Hz/60Hz, SXGA: 1280 × 1024@60Hz, XGA: 1024 × 768@60Hz
Decoding	Decoding Resolution	Up to 12MP
	Decoding Channel	32-ch
	Decoding Capability	24MP@30fps: 2-ch, 12MP@20fps:4-ch, 8MP@30fps: 8-ch, 5MP@30fps: 12-ch, 3MP@30fps: 20-ch, 1080p@30fps: 32-ch
	Split Screen	1/4/6/8/9/12/16/25
Interface	Network Interface	2, 10/100/1000 Mbps self-adaptive management network interface 2, 10/100/1000 Mbps self-adaptive Ethernet interface 16, 10M/100Mbps self-adaptive Ethernet interface
	Serial Interface	1 RS-232 (RJ45), 1 RS-485
	Two-way Audio Out	1-ch, 3.5 mm connector (2.0 Vp-p, 1 KΩ)
	Two-way Audio In	1-ch, 3.5 mm connector (2.0 Vp-p, 1 KΩ)
	Alarm In	8-ch
	Audio Output	4-ch, 1 DB 15
	Alarm Out	8-ch
General	Power Supply	220 VAC
	Power Consumption	≤ 70 W
	Dimensions(W × D × H)	440 × 311 × 44.5 mm (17.32 × 12.24 × 1.75 inch)
	Working Temperature	-10 °C to +55 °C (14 °F to 131 °F)
	Working Humidity	10% to 90%
	Weight	≤ 5.2 kg (11.4 lb)

## ▪ Physical Interface

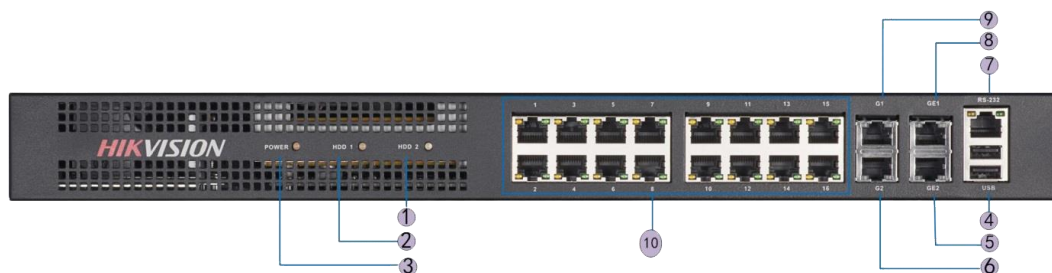

Index	Description	Index	Description
1	Power indicator	6	LAN 10/100/1000 Mbps Ethernet interface 2

2	HDD 1 indicator (reserved)	7	RS-232 interface
3	HDD 2 indicator (reserved)	8	Local management network interface 1
4	USB 2.0	9	LAN 10/100/1000 Mbps Ethernet interface 1
5	Local management network interface 2	10	LAN 10/100 Mbps Ethernet interface

## ▪ Available Model

DS-6904UDI

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com