

COLUMN LOUDSPEAKERS

COM Weatherproof Column Loudspeakers

COM aluminum body outdoor column loudspeakers.

COM 20 & COM 40

Wide frequency response and high sensitivity loudspeakers are ideal for speech and background music reproduction in large areas, where a simple and reliable solution is needed. Can be used in heavy weather conditions.




COM 20 is manufactured with two 5" (127 mm) full range speakers, **COM 40** has four 5" (127 mm) full range speakers.




COM 20






HORIZONTAL / VERTICAL POLAR DIAGRAMS

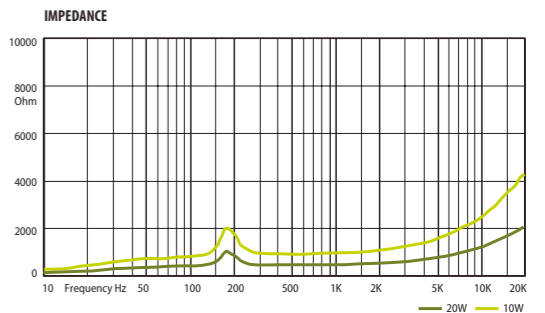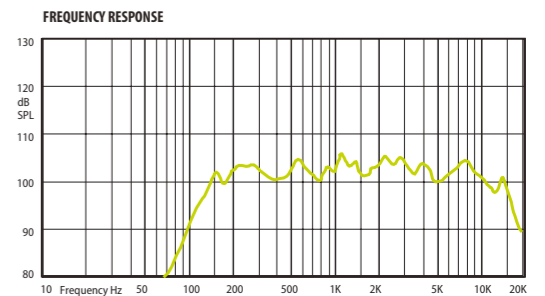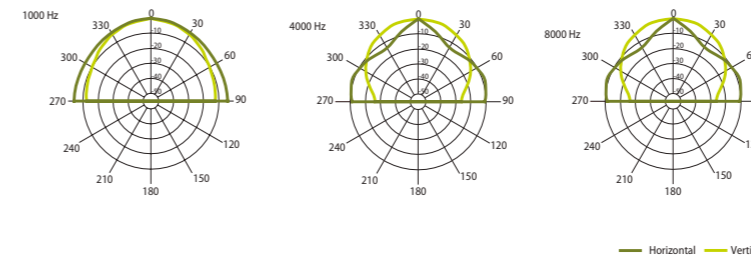

COM 40

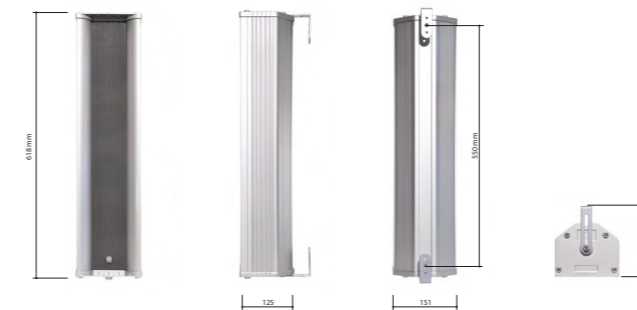

HORIZONTAL / VERTICAL POLAR DIAGRAMS

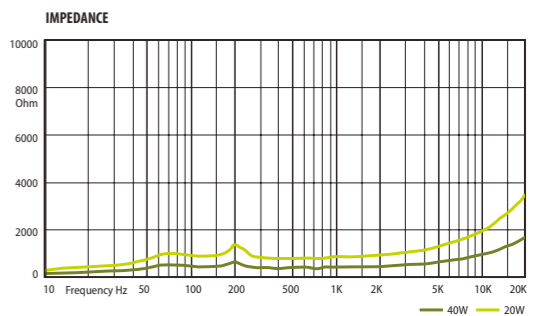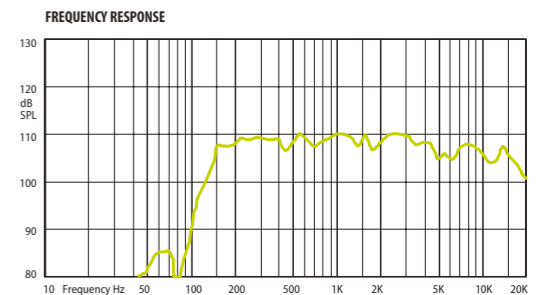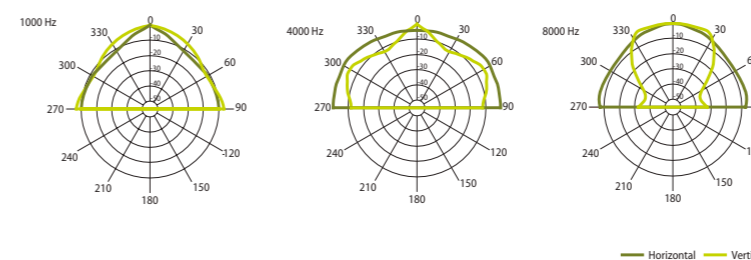

Technical Specifications	COM 20	COM 40
Rated power	20 W	40 W
Transformer power taps	20 W - 10 W	40 W - 20 W
Sensitivity	92 dB (1 W/1 m)	94 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m) at 1179 Hz	110 dB (Pmax/1 m) at 1113 Hz
Frequency response	100 Hz – 15 kHz	100 Hz – 15 kHz
Dispersion at 1000 Hz	180° (H), 150° (V)	180° (H), 150° (V)
Protection	IP 54	IP 54
Dimensions	378 mm × 151 mm x 125 mm	618 mm × 151 mm x 125 mm
Driver dimensions	2 x 5" (127 mm)	4 x 5" (127 mm)
Weight	2,9 kg	4,7 kg
Material	Aluminum	Aluminum
Colour	Grey (RAL 7038)	Grey (RAL 7038)