

# 75 Inches Intelligent Interactive Tablet

MW3575-T-C2



## Features

- 4K UHD anti-glare display delivers images with extreme detail.
- Metal casing, ultra-narrow frame, ultra-slim depth.
- The corners and edges are rounded or profiled, safe and reliable.
- Supports wireless screen sharing from computers, tablets, mobile phones to the display through wireless screen sharing dongles or screen sharing software.
- High-precision touch, smoother writing experience.
- Built-in Android system, optional pluggable OPS module, deep integration, richer experience.
- Dual Wi-Fi modules with both Wi-Fi and hotspot support.


## Specifications

Panel	Description
-------	-------------

Backlight	DLED backlight
Panel size	75 inches
Resolution	3840*2160
Brightness (cd/m <sup>2</sup> )	350
Contrast Ratio	1200:1
Response Time (ms)	8
Color Support	1.07B
Viewing Angle (H/V)	178° /178°
<b>System</b>	<b>Description</b>
CPU	Quad-core Cortex A55, Mali-G52
CPU Frequency	2 GHz
RAM/ROM	RAM: 4GB ROM: 32GB
System Compatibility	Android 11.0
<b>Touch</b>	<b>Description</b>
Touch Control	Infrared touch screen, 20-point multi-touch at most
Touch Precision (mm)	±2
Glass	4mm tempered glass, level 7 on Mohs hardness scale, anti-glare
Touch Response Time (ms)	≤8
Touchscreen Input	Opaque objects (e.g. finger, pen, etc.)
<b>Interface</b>	<b>Description</b>
Video Input	3*HDMI IN、1*VGA IN、 1*DP IN
Video Output	1*HDMI OUT
Audio Input	1*AUDIO IN
Audio Output	1*Line OUT
Other Interfaces	4* USB 3.0、 1* USB 2.0、 2* Type C、 2* Touch USB、 1* OPTICAL OUT、 1*RS232、 1*OPS
Network	1*RJ 45 IN、 1*RJ45 OUT
<b>Audio</b>	<b>Description</b>
Speaker	2.0 channel 2*15W
<b>Wi-Fi</b>	<b>Description</b>
WiFi Configuration	supports 5G/2.4G
WiFi Performance	12m transmission distance in open space
<b>Bluetooth</b>	<b>Description</b>
Bluetooth Version	5.2
Bluetooth Performance	12m transmission distance in open space
<b>OSD</b>	<b>Description</b>
Multi-Language	15 (Czech, Danish, German, English, Spanish, Finnish, French, Italian, Japanese, Dutch, Polish, Portuguese, Russian, Swedish, Simplified Chinese)
<b>VESA</b>	<b>Description</b>
Wall mount hole (mm)	600*400


Wall mount screw	4-M8 screw hole, 20mm depth
<b>General</b>	<b>Description</b>
Power Supply	AC 100 to 240V, 50/60Hz
Overall Power Consumption (W)	≤320
Standby Power Consumption (W)	<0.5
Product Dimensions (W*H*D) (mm)	1706.00*1008.50*91.20
Package Dimensions (W*H*D) (mm)	1836.10*1131.70*230.00
Weight (Kg)	Net weight: 58 Gross weight:68
Operating Temperature	0 to 40° C
Operating Humidity	10% to 80% (non-condensing)
Storage temperature	-20 to 60° C
Storage humidity	10% to 90% (non-condensing)
Accessories Included	1*remote control、1*power cord、1*touch pen、1*quick guide、1* wall mount

## Dimensions

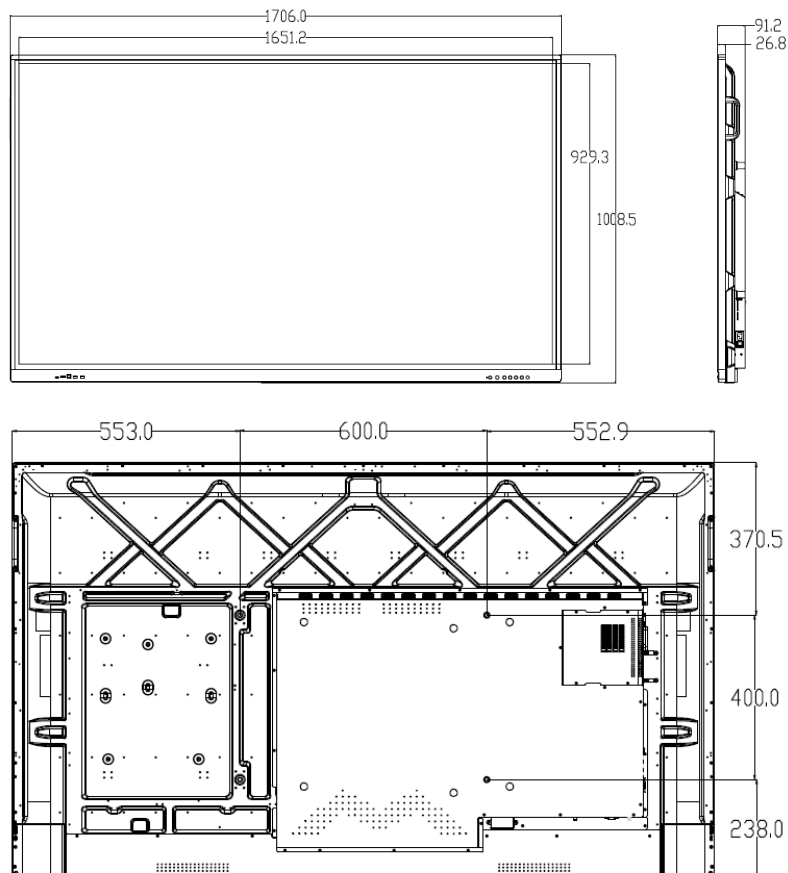


## Interface

Front interfaces:



Side interfaces:

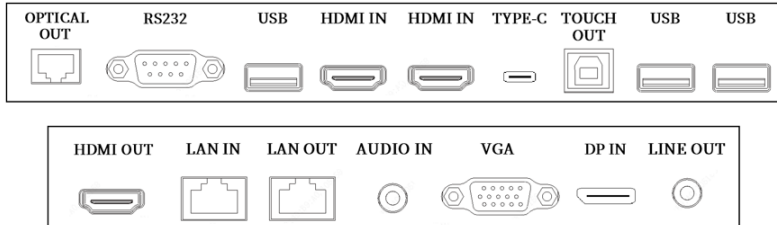

## Ordering Information for Optional Accessories

Model	Remarks
HB-7199-TP-C2	Wireless screen sharing dongle
HB-8765-S	65" to 86" Mobile stand
HB-7099-M1	Pluggable PC module with i5 processor (Windows 10, not activated)
HB-7099-S1	Pluggable PC module with i7 processor (Windows 10, not activated)
LIS-WIN10-V	OS-Windows 10-1 to 1 license-IoT Enterprise Value version (with i5 processor OPS PC module)
LIS-WIN10-H	OS-Windows 10-1 to 1 license-IoT Enterprise High End version (with i7 processor OPS PC module)

### Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.