

TURBO 200

FOR SLIDING GATES UP TO 2500 KG, 230 VAC



The SC202MHD gearmotor now comes with a electro-mechanical brake as a standard

Aluminum polished base and rised fixing plate

Hidden external case fixing

With 230 Vac CT102B control unit with integrated display



COOLING FAN (SC202MHD) FOR INTENSIVE USE



STURDY AND PERFORMING MOTOR



ELECTRONIC AND MECHANICAL PARTS WELL PROTECTED FROM WEATHER CONDITIONS

TECHNICAL DATA


		SC202MHD	SC252M
MECHANICAL DATA			
speed	cm/s	17	17
torque	Nm	93	110
working cycle	%	50/70*	30
ELECTRICAL DATA			
control board		CT102I	CT102B
power	Vac	230	230
consumption	A	4	4
absorbed power	W	920	920
capacitor	µF	25	35
thermoprotection	°C	150	150
GENERIC DATA			
protection degree	IP	44	44
dimensions (L - D - H)	mm	360 - 270 - 390	360 - 270 - 390
weight	kg	24,8	23,7
working temperature	°C	-20 + 55	-20 + 55
gate maximum weight	Kg	2000	2500

* variable according to the gate weight and dimensions

MODELS

CODE	DESCRIPTION	PCS PALLET
SC202MHD	For sliding gates up to 2000 Kg, 230 Vac motor, control unit with magnetic limit switch and mechanical electro-brake. M4 pinion. Intensive use	18
SC252M	For sliding gates up to 2500 Kg, 230 Vac motor, control unit with magnetic limit switch. M4 pinion	16

DIMENSIONS

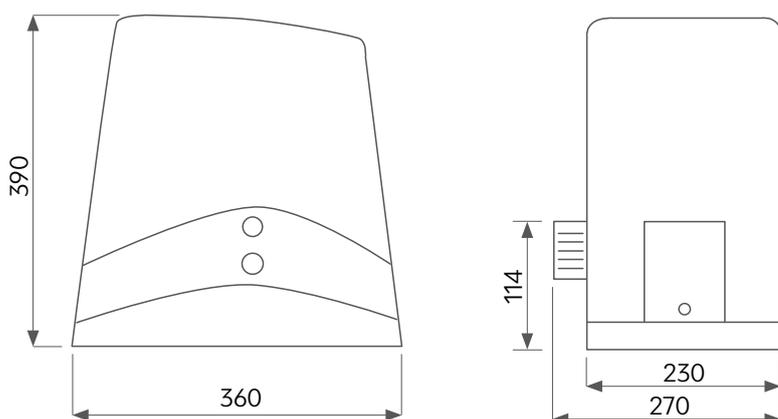

ACCESSORIES



RUEL004A00
Pinion M6 Z12

PC 1



CREM-12 *
M4 zinc coated rack 30x12 mm
L=1000 mm

€/m



CREM-30 **
M6 zinc coated rack 30x30 mm
L=1000 mm

€/m



SC-EF
Mechanical electro-brake
(for SC252M)

PC 1



RX4K
4-channel plug-in receiver,
433MHz, for CT202
control unit

PC 1

* Pack of 4 pcs
** Pack of 2 pcs.