


## 4.3 Inch Analogue Kit



VTO5000C

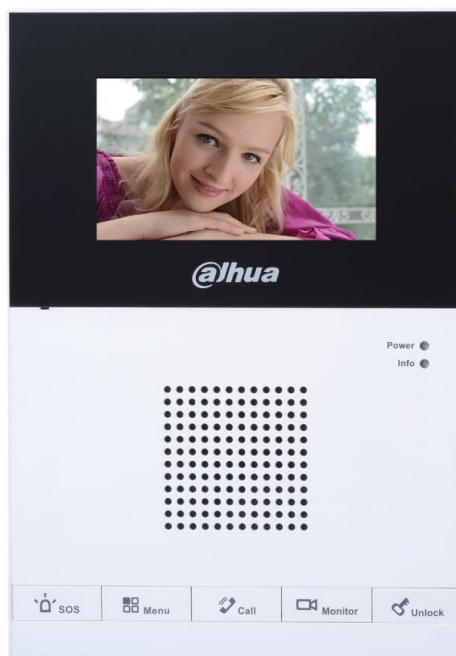

VTO1200CS

## Features

- 4.3" color TFT-LCD display
- Cat 5e system, easy installation
- Visitor calling, video communication, unlock, monitor,
- Compatible to up to 4 security sensors (burglar, fire, gas leakage, etc)
- Color CMOS night vision camera

## Specifications


Model		VTO5000C
Video	Type	color
	Resolution	600 lines
	Night vision	Support
Audio	Audio Input	1-ch microphone input
	Audio Output	1-ch loudspeaker output
	Bidirectional Talk	1-ch bidirectional talk, two way
Operating modes	input	One mechanical button with background light
Alarm	tamper	Support

## VTKA-VTO5000C-VTH1200CS

<b>General</b>	<b>Power</b>	DC 24V
	<b>Power Consumption</b>	Standby $\leq 1W$ , work $\leq 4W$
	<b>work environment</b>	<b>Temperature:</b> $-20^{\circ}C \sim +60^{\circ}C$
	<b>Dimensions</b>	141mm*100mm*16.8mm (L*W*T)
	<b>Weight</b>	0.4kg

Mode		VTH1200CS
<b>System</b>	<b>Main Processor</b>	NEC MCU
	<b>Operation Interface</b>	Simple OSD message
	<b>Input Device</b>	Mechanical keys, 5
<b>Video</b>	<b>Video Input</b>	1-ch CVBS analog video
	<b>Video Display</b>	4.3" color LCD, resolution: 480*272
	<b>Monitoring</b>	Support monitoring with monitor button
<b>Audio</b>	<b>Audio Input</b>	1-ch microphone input (Omni-directional electrets) 1-ch handset pickup input
	<b>Audio Output</b>	1-ch loudspeaker output 1-ch handset speaker output
	<b>Bidirectional Talk</b>	1-ch bidirectional talk, two way
<b>Network Function</b>	<b>Net Control</b>	Monitor & Unlock
		Call management center for emergency
		RS485 bus
		Remotely upgrading
<b>Interface</b>	<b>Net Interface</b>	RJ45 (non-Ethernet) plug connected with distributor, including power supply, AV and control signal
	<b>RS485</b>	Bus control and software upgrading
	<b>DC Power</b>	24V
<b>System Upgrading</b>		Remote network upgrading
<b>General</b>	<b>Power</b>	24V
	<b>Power Consumption</b>	Standby $\leq 1W$ , max $\leq 5W$
	<b>Temperature</b>	$-5^{\circ}C - +55^{\circ}C$
	<b>Humidity</b>	20% - 90%
	<b>Dimensions</b>	220.1mm*156.3mm*12.1mm (L*W*T) ;
	<b>Weight</b>	0.45Kg;
	<b>Installation Method</b>	Installed on 86 box sheet metal bracket

## Application

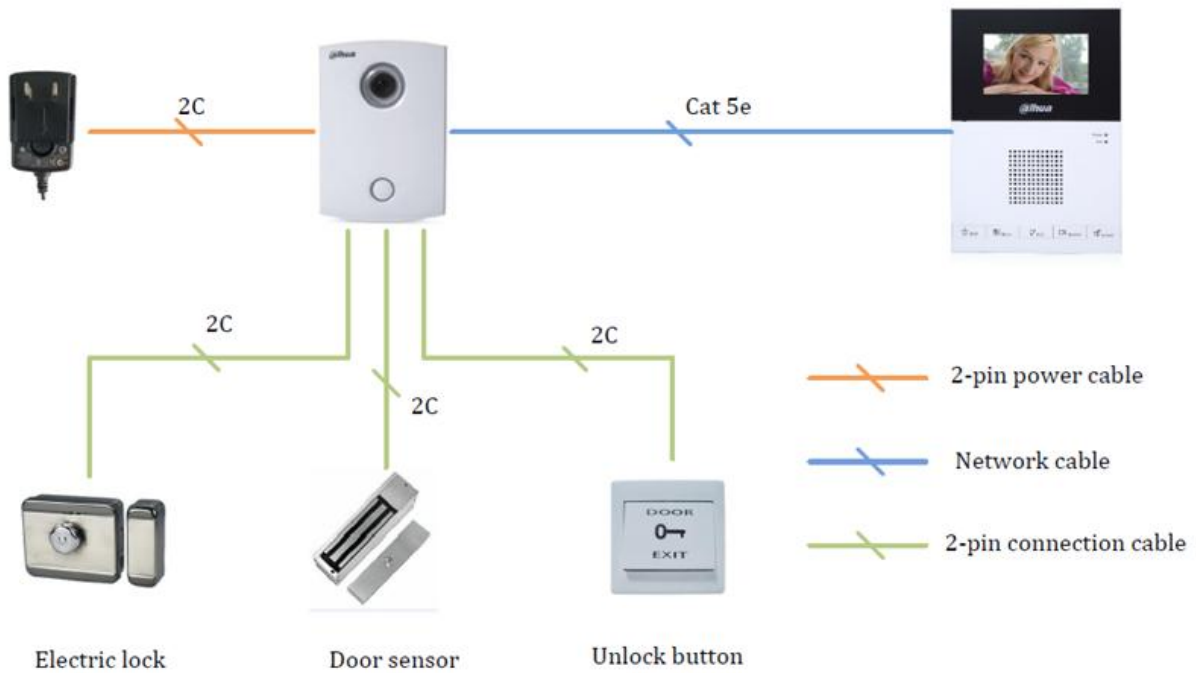

### Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.